

# PA orthogonal conveyor under the press

## TECHNICAL DATA SHEET



### DRIVE UNIT

- Position: pendular on the LH side
- Gear motor power: 0.12 kW
- Conveyor speed: 3 m/min fixed
- Connection Voltage: 400 Volts/50 Hz
- Connection plug: 4P (3 phases+ground)

### BELT

- Smooth green PU covering (ref. Pantone 320)
- Vulcanised belt joint
- Temperature resistance: -10°C to +90°C

### SECTION

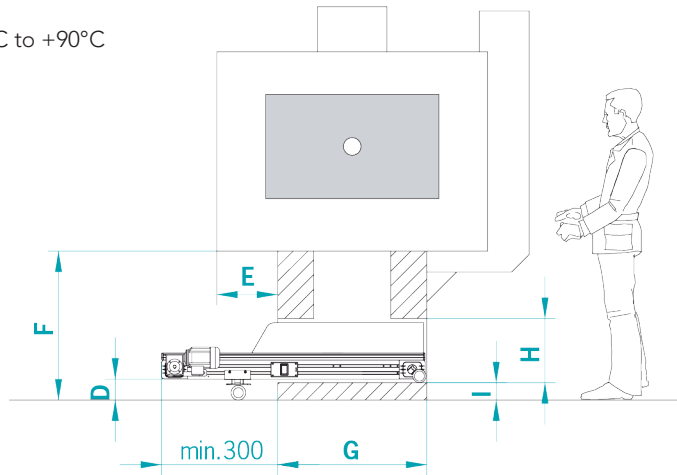

A (mm)	
D (mm)	
E (mm)	
F (mm)	
G (mm)	
H (mm)	
I (mm)	<input type="checkbox"/> fixed h= _____ <input type="checkbox"/> adjustable h min= _____ h max= _____
L (mm)	
Capacity (Kg)	
Material to be conveyed	
Specify presence of lubricant, coolant or other fluid, if present.	

## OPTIONAL

### DRIVE UNIT

- Mounted on opposite side: RH side
- Drum motor (gear motor inside roller)

### MB CONTROL PANEL 400 Volt/3/50 Hz

- Mod. NEW TOP CONTROL complete with programs and with three-phase Inverter

### STANDARD FUNCTIONS

- Adjustable speed from \_\_\_\_\_ to \_\_\_\_\_ mt/min.
- Pause/Work for step-by-step advancement
- Robot/Pulse for timed advancement by external command

### BELT

- Standard green PU (ref. Pantone 320) with slats  
h= \_\_\_\_\_ mm (standard 20/30/50),  
pitch= \_\_\_\_\_ mm (standard 400).
- For high temperatures, white Hytrel (max 110°C constant with momentary peaks +130°C) with slats  
h= \_\_\_\_\_ mm (standard 20/30/50),  
pitch= \_\_\_\_\_ mm (standard 400).
- Embossed green PVC (ref. Pantone 320) without slats

### NOTES